



# **RBK International Indonesia (Rubbex Conveyors & Engineering)**

## **PRODUCT CATALOGUE**

Level 7-1 Menara Rajawali II. DR Anak Agung Gde Agung, Lot#5.1,  
Mega Kuningan, Jakarta Selatan. Indonesia. 12950 Ph: (021) 2960 1505

Contact : +61404219800 | +62 822-5254-9696 |

Email : [vinod@rbkinternational.com](mailto:vinod@rbkinternational.com)

[sales@rubbexconveyors.com](mailto:sales@rubbexconveyors.com)

# WELCOME

---

**01** Rubbex Roller  
02 Company Overview  
05 Product Catalogue  
06 QualiFication And Glory

---

**07** Type OF Carrying  
08 Type OF Return  
09 Photo Gallery  
11 Product ClassiFication

---

**12** Shaft Slot Type  
13 Carrier Roller  
14 Impact Roller  
15 HDPE Roller

---

**16** Return Roller  
17 Spiral Return Roller  
18 Rubber Disc Roller  
19 Carrier/Impact Stand

---

## CONTENT

**20** Transition Stand  
21 Self Aligning Carrier  
22 Self Aligning Return  

---

**23** Self Aligning V- Return  
24 Drum Pulley  
25 PerFormance Displa



# RUBBEX ROLLER

## PRODUCT CATALOGUE

Level 7-1 Menara Rajawali Jl. DR Anak Agung Gde Agung,  
Lot#5.1, Mega Kuningan, Jakarta Selatan.  
Indonesia.12950 Ph: (021) 2960 1505



Together, We Make It Better.

# Rubbex Conveyors

**Our vision is to be Perfect,  
Excellent and Best in the World**

Rubbex Conveyor Machinery was founded in 2007, engaged in the manufacture of conveyor. conveyor parts, including various kinds of conveyor rollers, conveyor pulleys and support frames ,widely used for mine, coal, cement, electric power metallurgy, steel, chemical, port, hydroelectric power and grain industries, etc.

With more than thirty years' abundant experience and industries and hardworking staff members, we can meet various requirements from different types of customers. Our products have exported to many countries all over the world, especially the USA, Canada, the UK, Denmark, Greece, South America, Australia, South East Asia, South Africa and Middle East. At present we have very good feedback from customers and build long term cooperation relationship with them.

In addition, we have attained ISO 9001,SGS,BV and CE certifications. There is rich experiences for us to manufacture all standard, such as JIS,DIN and CEMA(A B C D). Besides we accept OEM service and can manufacture as customers' drawings and requirements.

Together, we make it better is our company's slogan. As a company with strong responsibility and good reputation, we are always committed to providing high quality, competitive price and best after-sales service to every customer. We warmly welcome customers all over the world and we will try our best to make advantage for you.

## Company Overview

bulk material handling solutions



Together, We Make It Better.




# RUBBEX ROLLER


## PRODUCT CATALOGUE

Level 7-1 Menara Rajawali Jl. DR. Anak Agung Gde  
Agung,

Yogyakarta 55132 Indonesia



RUBBEX  
CONVEYOR MACHINERY

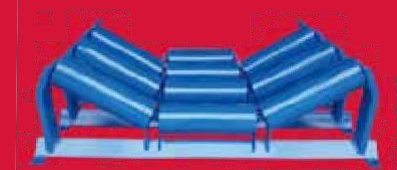


Together, We Make It Better.

Website: [www.rubbexconveyors.com](http://www.rubbexconveyors.com)




Troughing roller stand For general carrying service is produced with inclination degree of  $20^{\circ}$ ,  $30^{\circ}$ ,  $35^{\circ}$ ,  $45^{\circ}$

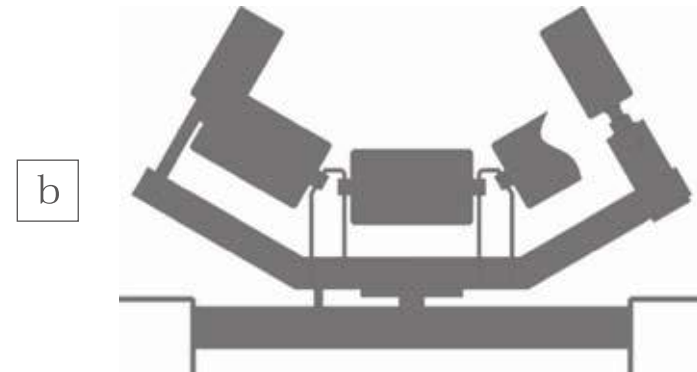

Self-aligning carrier roller automatically trains belt and protects edges From damage cause misalignment. It's produced with inclination degree of  $30^{\circ}$ ,  $35^{\circ}$ ,  $45^{\circ}$




Flat carrier roller stand used to bulk handling material such as preparing Foundry sand, package and sort conveyor.

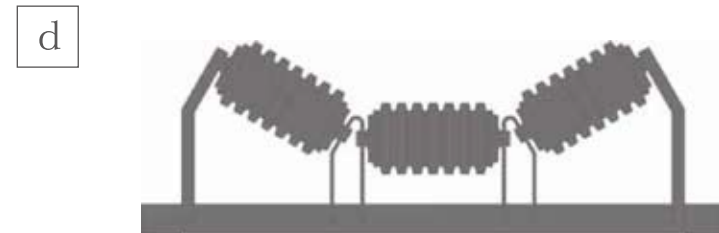

Troughing rubber impact roller stand protects belt by absorbing impact at loading and transfer point. It's produced with inclination degree of  $30^{\circ}$ ,  $35^{\circ}$ ,  $45^{\circ}$

## TYPE OF RETURN

e

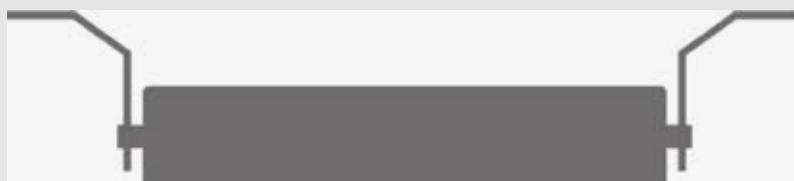

Return roller carries the empty belt on return run.

f



Rubber Disc Return roller used when wet, sticky material tends to cling to the belt. Also used to avoid corrosion. It's produced in NR or SBR.

g



Spiral Return roller used to clean from materials that adhere to the belt. It's produced in spiral rubber.

h



Self-aligning return roller automatically trains the belt return and protects edges from damage caused by belt misalignment.

i



Rigid Frame V return roller trains the return belt, adds benefit when carrying more capacities. It's produced with inclination degree of 5°, 10° and 15°.



# RUBBEX ROLLER

## PRODUCT CATALOGUE

Level 7-1 Menara Rajawali Jl. DR. Anak Agung Gde  
Agung,

CARRIER ROLLER



RUBBER DISC  
RETURN ROLLER



HDPE  
CARRIER ROLLER



IMPACT ROLLER  
GUIDE ROLLER



## PHOTO GALLERY




## PHOTO GALLERY




◀ SPIRAL RUBBER  
RETURN ROLLER



TAKE UP PULLEY

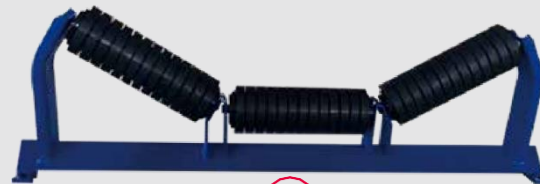

⤴ IMPACT ROLLER SET

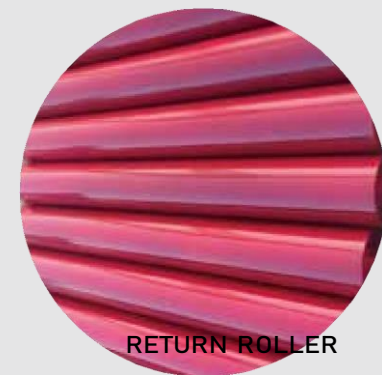

RETURN ROLLER



⤴ SELF ALIGNING  
CARRIER ROLLER

CARRIER ROLLER SET



DRIVE PULLEY WITH  
CERAMIC LAGGING



⤴

# RUBBEX ROLLER

## PRODUCT CLASIFICATION

● CRS - ● 100 - ● 30 - ● A1 - ● 02

| Description |                                 |
|-------------|---------------------------------|
| CR          | Carrier Roller                  |
| IR          | Impact Roller                   |
| RR          | Return Roller                   |
| VR          | V - Return Roller               |
| RDR         | Rubber Disc Return Roller       |
| SRR         | Spiral Return Roller            |
| GR          | Guide Roller                    |
| PEC         | HDPE Carrier Roller             |
| PER         | HDPE Return Roller              |
| CRS         | Carrier Roller Stand            |
| IRS         | Impact Roller Stand             |
| TRS         | Transition Stand                |
| RRS         | Return Roller Stand             |
| VRS         | V - Return Roller Stand         |
| SACR        | Self Aligning Carrie Roller     |
| SAVR        | Self Aligning Return Roller     |
| HP          | Self Aligning V - Return Roller |
| DP          | Head Pulley                     |
| TP          | Drive Pulley                    |
| BP          | Tail Pulley                     |
| SP          | Snub Pulley                     |
| TUP         | Take-up Pulley                  |

| Belt Width |             |
|------------|-------------|
| 40         | 400         |
| 45         | 450         |
| 50         | 500         |
| 60         | 600 Ø 89.1  |
| 65         | 650         |
| 61         | 600 Ø 114.3 |
| 75         | 750         |
| 80         | 800         |
| 90         | 900         |
| 100        | 1000        |
| 105        | 1050        |
| 120        | 1200        |
| 140        | 1400        |
| 160        | 1600        |
| 180        | 1800        |
| 200        | 2000        |
| 220        | 2200        |
| 240        | 2400        |








| Trough Angle    |                        |
|-----------------|------------------------|
| 00              | 0°/Roller Only         |
| 05              | 5°                     |
| 10              | 10°                    |
| 15              | 15°                    |
| 20              | 20°                    |
| 25              | 25°                    |
| 30              | 30°                    |
| 35              | 35°                    |
| 45              | 45°                    |
| Shaft Slot Type |                        |
| See page 11     |                        |
| Bearing Type    |                        |
| 02              | Ball Bearing Series 62 |
| 03              | Ball Bearing Series 63 |



Website: [www.rubbexconveyors.com](http://www.rubbexconveyors.com)

# RUBBEX ROLLER

## SHAFT SLOT TYPE

| Type | Arrangement                                                                         | Dimension |     |    |   |    | Type | Arrangement                                                                          | Dimension |             |   |   |   |
|------|-------------------------------------------------------------------------------------|-----------|-----|----|---|----|------|--------------------------------------------------------------------------------------|-----------|-------------|---|---|---|
|      |                                                                                     | Ø d       | B   | K  | C | W  |      |                                                                                      | Ø d       | B           | K | C | W |
| A1   |    | 20        | 11  | 8  | 3 | 14 | A5   |   | 20        | M8          | - | - |   |
|      |                                                                                     | 25        |     |    |   | 18 |      |                                                                                      | 25        | M10         | - | - |   |
|      |                                                                                     | 30        |     |    |   | 22 |      |                                                                                      | 30        | M12         | - | - |   |
|      |                                                                                     | 35        | 15  | 11 | 4 | 25 |      |                                                                                      | 35        | M12         | - | - |   |
|      |                                                                                     | 40        |     |    |   | 31 |      |                                                                                      | 40        | M14         | - | - |   |
|      |                                                                                     | 50        |     |    |   | 42 |      |                                                                                      | 50        | M16         | - | - |   |
| A2   |    | 20        | 11  | -  | - | 14 | A6   |   | 20        | -           | - | - | - |
|      |                                                                                     | 25        |     | -  | - | 18 |      |                                                                                      | 25        | -           | - | - | - |
|      |                                                                                     | 30        |     | -  | - | 22 |      |                                                                                      | 30        | -           | - | - | - |
|      |                                                                                     | 35        | 15  | -  | - | 25 |      |                                                                                      | 35        | -           | - | - | - |
|      |                                                                                     | 40        |     | -  | - | 31 |      |                                                                                      | 40        | -           | - | - | - |
|      |                                                                                     | 50        |     | -  | - | 42 |      |                                                                                      | 50        | -           | - | - | - |
| A3   |   | 20        | 11  |    | - | 14 | A7   |  | 20        | as required |   |   |   |
|      |                                                                                     | 25        | 15  |    | - | 18 |      |                                                                                      | 25        |             |   |   |   |
|      |                                                                                     | 30        | 17  |    | - | 22 |      |                                                                                      | 30        |             |   |   |   |
|      |                                                                                     | 35        | 20  |    | - | 25 |      |                                                                                      | 35        |             |   |   |   |
|      |                                                                                     | 40        | 20  |    | - | 31 |      |                                                                                      | 40        |             |   |   |   |
|      |                                                                                     | 50        | 25  |    | - | 42 |      |                                                                                      | 50        |             |   |   |   |
| A4   |  | 20        | M16 |    | - | -  |      |                                                                                      |           |             |   |   |   |
|      |                                                                                     | 25        | M22 |    | - | -  |      |                                                                                      |           |             |   |   |   |
|      |                                                                                     | 30        | M24 |    | - | -  |      |                                                                                      |           |             |   |   |   |
|      |                                                                                     | 35        | M32 |    | - | -  |      |                                                                                      |           |             |   |   |   |
|      |                                                                                     | 40        | M36 |    | - | -  |      |                                                                                      |           |             |   |   |   |
|      |                                                                                     | 50        | M36 |    | - | -  |      |                                                                                      |           |             |   |   |   |


# RUBBEX ROLLER

PRODUCT CATALOGUE

# RUBBEX ROLLER

## CARRIER ROLLER

JIS STANDARD

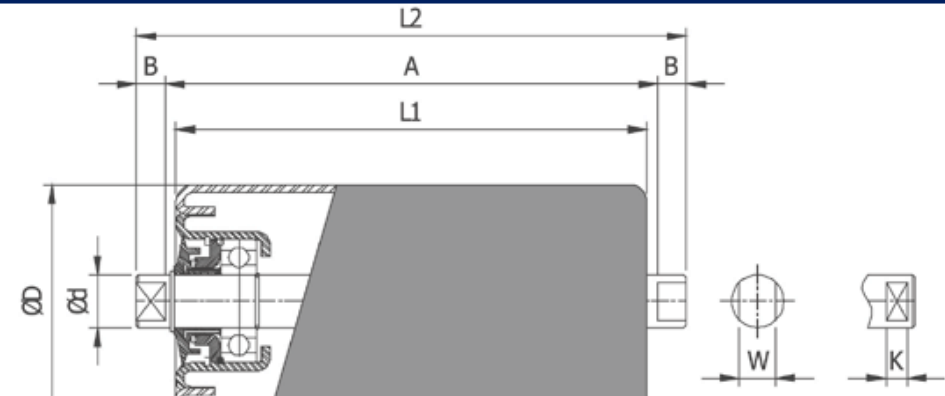

# RUBBEX ROLLER


“

Rubbex Roller can  
Manufacture  
JIS/DIN/CEMA Standard  
(for more information  
Please visit  
[www.rubbexconveyors.com](http://www.rubbexconveyors.com))

”

| Belt Width | Type     | Dimension |      |     |     |     |    |    |    | Bearing  |
|------------|----------|-----------|------|-----|-----|-----|----|----|----|----------|
|            |          | Ø D       | Ø d  | L1  | L2  | A   | K  | B  | W  |          |
| 400        | CR-400   | Ø 89.1    | Ø 20 | 145 | 175 | 153 | 8  | 11 | 14 | 6204 2RS |
| 450        | CR-450   |           |      | 165 | 195 | 173 |    |    |    |          |
| 500        | CR-500   |           |      | 180 | 210 | 188 |    |    |    |          |
| 600        | CR-600-1 |           |      | 210 | 240 | 218 |    |    |    |          |
| 650        | CR-650   |           |      | 225 | 255 | 233 |    |    |    |          |
| 600        | CR-600-2 | Ø 114.3   | Ø 20 | 210 | 240 | 218 | 11 | 15 | 18 | 6205 2RS |
| 750        | CR-750   |           |      | 265 | 295 | 273 |    |    |    |          |
| 800        | CR-800   |           |      | 275 | 305 | 283 |    |    |    |          |
| 900        | CR-900   |           |      | 315 | 345 | 323 |    |    |    |          |
| 1000       | CR-1000  | Ø 139.8   | Ø 25 | 350 | 390 | 360 |    |    |    |          |
| 1050       | CR-1050  |           |      | 370 | 410 | 380 |    |    |    |          |
| 1200       | CR-1200  |           |      | 420 | 460 | 430 |    |    |    |          |
| 1400       | CR-1400  | Ø 165.2   | Ø 30 | 500 | 540 | 510 |    |    | 22 | 6206 2RS |
| 1600       | CR-1600  |           |      | 580 | 620 | 590 |    |    |    |          |
| 1800       | CR-1800  |           | Ø 35 | 650 | 690 | 660 |    |    | 25 | 6207 2RS |
| 2000       | CR-2000  |           |      | 730 | 770 | 740 |    |    |    |          |
| 2200       | CR-2200  |           | Ø 40 | 800 | 840 | 810 |    |    | 31 | 6208 2RS |
| 2400       | CR-2400  |           |      | 880 | 920 | 890 |    |    |    |          |

# RUBBEX ROLLER

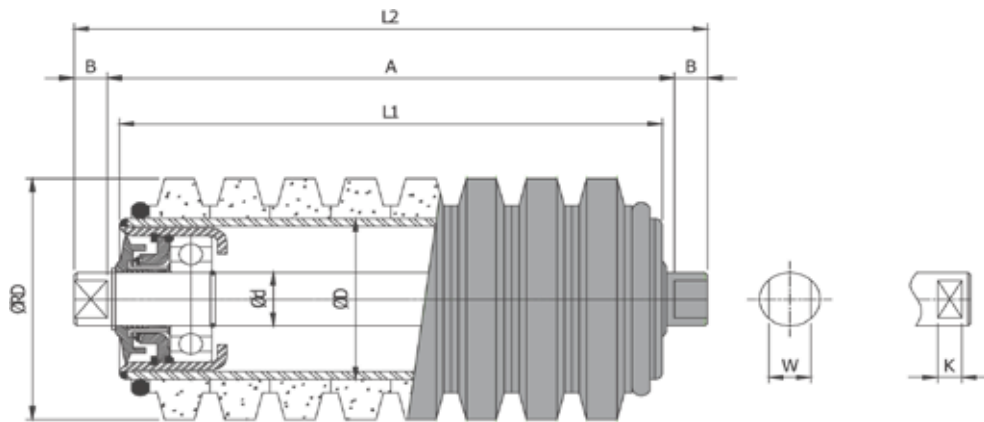

## JIS STANDARD

“

Rubbex Roller Can Manufacture JIS/DIN/CEMA  
Standard (for more information please visit  
[www.rubbexconveyors.com](http://www.rubbexconveyors.com))


”

| Belt Width | Type     | Dimension |         |      |     |     |     |    |    |    | Bearing  |
|------------|----------|-----------|---------|------|-----|-----|-----|----|----|----|----------|
|            |          | Ø RD      | Ø D     | Ø d  | L1  | L2  | A   | K  | B  | W  |          |
| 400        | IR-400   | Ø 90      | Ø 60.3  | Ø 20 | 145 | 175 | 153 | 8  | 11 | 14 | 6204 2RS |
| 450        | IR-450   |           |         |      | 165 | 195 | 173 |    |    |    |          |
| 500        | IR-500   |           |         |      | 180 | 210 | 188 |    |    |    |          |
| 600        | IR-600-1 |           |         |      | 210 | 240 | 218 |    |    |    |          |
| 650        | IR-650   |           |         |      | 225 | 255 | 233 |    |    |    |          |
| 600        | IR-600-2 | Ø 115     | Ø 76.3  | Ø 20 | 210 | 240 | 218 | 8  | 11 | 14 | 6204 2RS |
| 750        | IR-750   |           |         |      | 265 | 295 | 273 |    |    |    |          |
| 800        | IR-800   |           |         |      | 275 | 305 | 283 |    |    |    |          |
| 900        | IR-900   |           |         |      | 315 | 345 | 323 |    |    |    |          |
| 1000       | IR-1000  | Ø 140     | Ø 89.1  | Ø 25 | 350 | 390 | 360 | 11 | 15 | 18 | 6205 2RS |
| 1050       | IR-1050  |           |         |      | 370 | 410 | 380 |    |    |    |          |
| 1200       | IR-1200  |           |         |      | 420 | 460 | 430 |    |    |    |          |
| 1400       | IR-1400  | Ø 166     | Ø 114.3 | Ø 30 | 500 | 540 | 510 |    |    | 22 | 6206 2RS |
| 1600       | IR-1600  |           |         |      | 580 | 620 | 590 |    |    |    |          |
| 1800       | IR-1800  |           |         | Ø 35 | 650 | 690 | 660 |    |    | 25 | 6207 2RS |
| 2000       | IR-2000  |           |         |      | 730 | 770 | 740 |    |    |    |          |
| 2200       | IR-2200  |           |         | Ø 40 | 800 | 840 | 810 |    |    | 31 | 6308 2RS |
| 2400       | IR-2400  |           |         |      | 880 | 920 | 890 |    |    |    |          |

# RUBBEX ROLLER

# HDPE ROLLER

JIS STANDARD

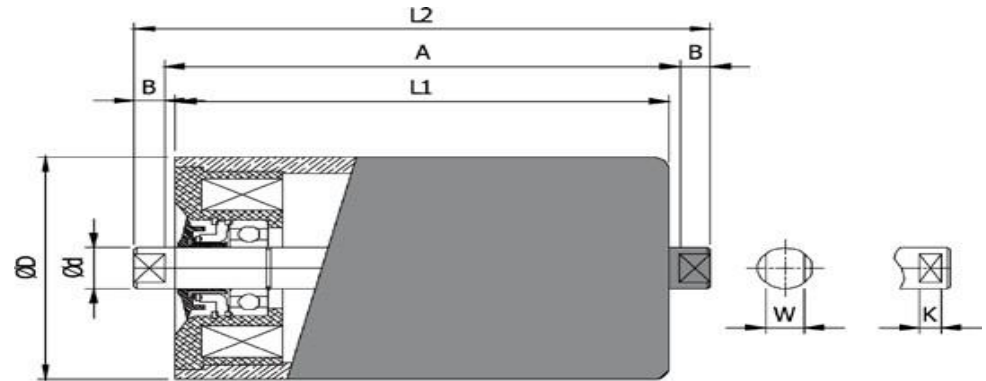

## RUBBEX ROLLER


“Rubbex Roller Can  
Manufacture JIS/DIN/CEMA  
Standard  
(for more information  
please visit:  
[www.rubbexconveyors.com](http://www.rubbexconveyors.com))”

| Belt Width | Dimension |      |    |      |    |          | HDPE CARRIER ROLLER |     |     |     | HDPE RETURN ROLLER |      |      |      |
|------------|-----------|------|----|------|----|----------|---------------------|-----|-----|-----|--------------------|------|------|------|
|            | Ø D       | Ø d  | K  | B    | W  | Bearing  | Type                | 1L  | L2  | A   | Type               | L1   | L2   | A    |
| 400        | Ø 90      | Ø 20 | 8  | 12.5 | 14 | 6204 2RS | PEC-400             | 145 | 175 | 153 | PER-400            | 460  | 505  | 480  |
| 450        |           |      |    |      |    |          | PEC-450             | 165 | 195 | 173 | PER-450            | 510  | 555  | 530  |
| 500        |           |      |    |      |    |          | PEC-500             | 180 | 210 | 188 | PER-500            | 560  | 605  | 580  |
| 600        |           |      |    |      |    |          | PEC-600-1           | 210 | 240 | 218 | PER-600-1          | 660  | 705  | 680  |
| 650        |           |      |    |      |    |          | PEC-650             | 225 | 255 | 233 | PER-650            | 710  | 755  | 730  |
| 600        | Ø 110     | Ø 20 | 8  | 12.5 | 14 | 6204 2RS | PEC-600-2           | 210 | 240 | 218 | PER-600-2          | 660  | 705  | 680  |
| 750        |           |      |    |      |    |          | PEC-750             | 265 | 295 | 273 | PER-750            | 850  | 905  | 880  |
| 800        |           |      |    |      |    |          | PEC-800             | 275 | 305 | 283 | PER-800            | 900  | 955  | 930  |
| 900        | Ø 125     | Ø 25 | 11 | 16   | 18 | 6205 2RS | PEC-900             | 315 | 345 | 323 | PER-900            | 1000 | 1055 | 1030 |
| 1000       | Ø 140     |      |    |      |    |          | PEC-1000            | 350 | 390 | 360 | PER-1000           | 1100 | 1162 | 1140 |
| 1050       |           |      |    |      |    |          | PEC-1050            | 370 | 410 | 380 | PER-1050           | 1150 | 1212 | 1180 |
| 1200       | Ø 140     | Ø 25 | 11 | 16   | 18 | 6205 2RS | PEC-1200            | 420 | 460 | 430 | PER-1200           | 1300 | 1362 | 1330 |
| 1400       | Ø 160     | Ø 30 | 11 | 17.5 | 22 | 6206 2RS | PEC-1400            | 500 | 540 | 510 | PER-1400           | 1510 | 1585 | 1550 |
| 1600       |           |      |    |      |    |          | PEC-1600            | 580 | 620 | 590 | PER-1600           | 1710 | 1785 | 1750 |
| 1800       |           | Ø 35 |    |      | 25 | 6207 2RS | PEC-1800            | 650 | 690 | 660 | PER-1800           | 2000 | 2075 | 2040 |
| 2000       |           |      |    |      |    |          | PEC-2000            | 730 | 770 | 740 | PER-2000           | 2200 | 2275 | 2240 |
| 2200       |           | Ø 40 |    |      | 31 | 6308 2RS | PEC-2200            | 800 | 840 | 810 | PER-2200           | 2400 | 2475 | 2440 |
| 2400       |           |      |    |      |    |          | PEC-2400            | 880 | 920 | 890 | PER-2400           | 2600 | 2675 | 2640 |

# Rubbex Roller

## RETURN ROLLER

| Belt Width | Dimension |      |    |      |    |          | RETURN ROLLER |      |      |      | V- RETURN ROLLER |      |      |      |
|------------|-----------|------|----|------|----|----------|---------------|------|------|------|------------------|------|------|------|
|            | Ø D       | Ø d  | K  | B    | W  | Bearing  | Type          | L1   | L2   | A    | Type             | L1   | L2   | A    |
| 400        | Ø 89.1    | Ø 20 | 8  | 12.5 | 14 | 6204 2RS | RR-400        | 460  | 505  | 480  | VR-400           | 220  | 250  | 228  |
| 450        |           |      |    |      |    |          | RR-450        | 510  | 555  | 530  | VR-450           | 245  | 275  | 253  |
| 500        |           |      |    |      |    |          | RR-500        | 560  | 605  | 580  | VR-500           | 270  | 300  | 278  |
| 600        |           |      |    |      |    |          | RR-600-1      | 660  | 705  | 680  | VR-600-1         | 320  | 350  | 328  |
| 650        |           |      |    |      |    |          | RR-650        | 710  | 755  | 730  | VR-650           | 365  | 395  | 373  |
| 600        | Ø 114.3   |      |    |      |    |          | RR-600-2      | 660  | 705  | 680  | VR-600-2         | 320  | 350  | 328  |
| 750        |           |      |    |      |    |          | RR-750        | 850  | 905  | 880  | VR-750           | 415  | 445  | 423  |
| 800        |           |      |    |      |    |          | RR-800        | 900  | 955  | 930  | VR-800           | 440  | 475  | 448  |
| 900        |           |      |    |      |    |          | RR-900        | 1000 | 1055 | 1030 | VR-900           | 490  | 520  | 498  |
| 1000       |           |      |    |      |    |          | RR-1000       | 1100 | 1162 | 1140 | VR-1000          | 540  | 580  | 550  |
| 1050       | Ø 139.8   | Ø 25 |    | 16   | 18 | 6205 2RS | RR-1050       | 1150 | 1212 | 1180 | VR-1050          | 565  | 605  | 575  |
| 1200       |           |      |    |      |    |          | RR-1200       | 1300 | 1362 | 1330 | VR-1200          | 640  | 680  | 650  |
| 1400       | Ø 165.2   | Ø 30 | 11 | 17.5 | 22 | 6206 2RS | RR-1400       | 1510 | 1585 | 1550 | VR-1400          | 750  | 790  | 760  |
| 1600       |           |      |    |      |    |          | RR-1600       | 1710 | 1785 | 1750 | VR-1600          | 850  | 890  | 860  |
| 1800       |           | Ø 35 |    |      | 25 | 6207 2RS | RR-1800       | 2000 | 2075 | 2040 | VR-1800          | 980  | 1020 | 990  |
| 2000       |           |      |    |      |    |          | RR-2000       | 2200 | 2275 | 2240 | VR-2000          | 1080 | 1120 | 1090 |
| 2200       |           | Ø 40 |    |      | 31 | 6308 2RS | RR-2200       | 2400 | 2475 | 2440 | VR-2200          | 1180 | 1220 | 1190 |
| 2400       |           |      |    |      |    |          | RR-2400       | 2600 | 2675 | 2640 | VR-2400          | 1280 | 1320 | 1290 |

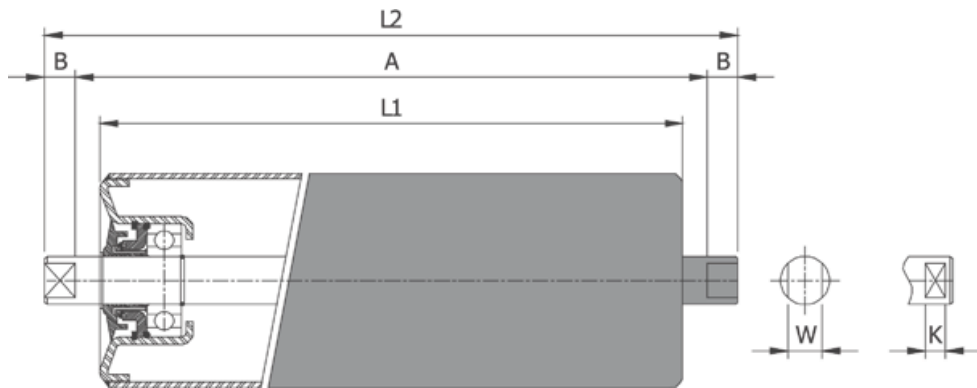


### JIS STANDARD

Rubbex Roller Can Manufacture JIS/DIN/CEMA Standard (for more information please visit [www.rubbexconveyors.com](http://www.rubbexconveyors.com))

# Rubbex Roller

## SPIRAL RETURN ROLLER

JIS STANDARD

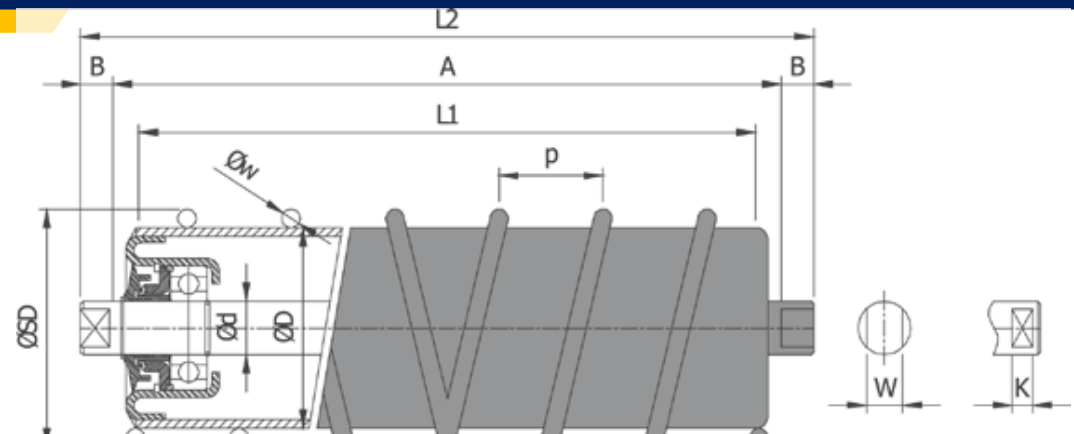

## RUBBEX ROLLER


“  
Rubbex Roller Can  
Manufacture  
JIS/DIN/CEMA Standard  
(for more information  
please visit  
[www.rubbexconveyors.com](http://www.rubbexconveyors.com))  
”

| Belt Width | Type      | Dimension |         |      |    |    |      |      |      |    |      |    | Bearing  |
|------------|-----------|-----------|---------|------|----|----|------|------|------|----|------|----|----------|
|            |           | Ø SD      | Ø D     | Ø d  | w  | p  | L1   | L2   | A    | K  | B    | W  |          |
| 400        | SRR-400   | Ø 90.3    | Ø 76.3  | Ø 20 | 7  | 40 | 460  | 505  | 480  | 8  | 12.5 | 14 | 6204 2RS |
| 450        | SRR-450   |           |         |      |    |    | 510  | 555  | 530  |    |      |    |          |
| 500        | SRR-500   |           |         |      |    |    | 560  | 605  | 580  |    |      |    |          |
| 600        | SRR-600-1 |           |         |      |    |    | 660  | 705  | 680  |    |      |    |          |
| 650        | SRR-650   |           |         |      |    |    | 710  | 755  | 730  |    |      |    |          |
| 600        | SRR-600-2 | Ø 115.1   | Ø 89.1  |      | 13 | 50 | 660  | 705  | 680  | 11 | 16   | 18 | 6205 2RS |
| 750        | SRR-750   |           |         |      |    |    | 850  | 905  | 880  |    |      |    |          |
| 800        | SRR-800   |           |         |      |    |    | 900  | 955  | 930  |    |      |    |          |
| 900        | SRR-900   |           |         |      |    |    | 1000 | 1055 | 1030 |    |      |    |          |
| 1000       | SRR-1000  | Ø 140.3   | Ø 114.3 | Ø 25 | 13 | 60 | 1100 | 1162 | 1140 | 11 | 17.5 | 22 | 6206 2RS |
| 1050       | SRR-1050  |           |         |      |    |    | 1150 | 1212 | 1180 |    |      |    |          |
| 1200       | SRR-1200  |           |         |      |    |    | 1300 | 1362 | 1330 |    |      |    |          |
| 1400       | SRR-1400  | Ø 165.8   | v139.8  | Ø 30 | 13 | 65 | 1510 | 1585 | 1550 | 11 | 17.5 | 25 | 6207 2RS |
| 1600       | SRR-1600  |           |         |      |    |    | 1710 | 1785 | 1750 |    |      |    |          |
| 1800       | SRR-1800  |           |         | Ø 35 |    |    | 2000 | 2075 | 2040 |    |      |    |          |
| 2000       | SRR-2000  |           |         |      |    |    | 2200 | 2275 | 2240 |    |      |    |          |
| 2200       | SRR-2200  |           |         |      |    |    | 2400 | 2475 | 2440 |    |      | 31 | 6308 2RS |
| 2400       | SRR-2400  |           |         | Ø 40 |    |    | 2600 | 2675 | 2640 |    |      |    |          |



# Rubbex Roller

## SPIRAL RETURN ROLLER

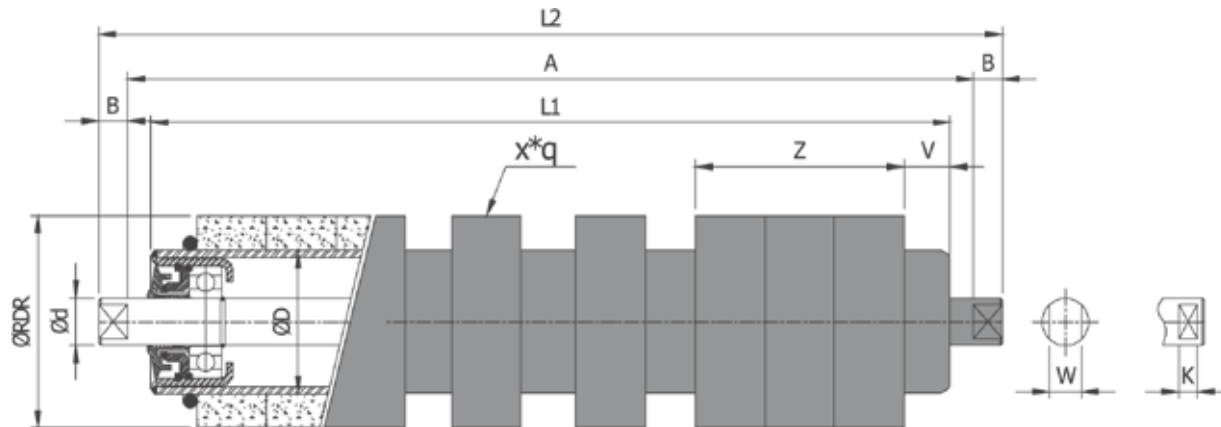

### JIS STANDARD


Rubbex Roller Can Manufacture JIS/DIN/CEMA Standard (for more information please visit [www.rubbexconveyors.com](http://www.rubbexconveyors.com))

| Belt Width | Type      | Dimension |         |      |    |     |      |      |      |    |      |      |      |
|------------|-----------|-----------|---------|------|----|-----|------|------|------|----|------|------|------|
|            |           | Ø RDR     | Ø D     | Ø d  | V  | Z   | L1   | L2   | A    | K  | B    | W    | X*q  |
| 400        | RDR-400   | Ø 90      | Ø 60.3  | Ø 20 | 20 | 90  | 460  | 505  | 480  | 8  | 12.5 | 14   | 30*2 |
| 450        | RDR-450   |           |         |      |    |     | 510  | 555  | 530  |    |      |      | 30*3 |
| 500        | RDR-500   |           |         |      |    |     | 560  | 605  | 580  |    |      |      | 30*3 |
| 600        | RDR-600-1 |           |         |      |    |     | 660  | 705  | 680  |    |      |      | 30*4 |
| 650        | RDR-650   |           |         |      |    |     | 710  | 755  | 730  |    |      |      | 30*5 |
| 600        | RDR-600-2 | Ø 115     | Ø 76.3  |      | 25 | 120 | 660  | 705  | 680  |    |      |      | 30*3 |
| 750        | RDR-750   |           |         |      |    |     | 850  | 905  | 880  |    |      |      | 30*5 |
| 800        | RDR-800   |           |         |      |    |     | 900  | 955  | 930  |    |      |      | 30*5 |
| 900        | RDR-900   |           |         |      |    |     | 1000 | 1055 | 1030 |    |      |      | 30*6 |
| 1000       | RDR-1000  | Ø 140     | Ø 89.1  | Ø 25 | 25 | 160 | 1100 | 1162 | 1140 |    | 16   | 18   | 30*5 |
| 1050       | RDR-1050  |           |         |      |    |     | 1150 | 1212 | 1180 |    |      |      | 30*5 |
| 1200       | RDR-1200  |           |         |      |    |     | 1300 | 1362 | 1330 |    |      |      | 30*6 |
| 1400       | RDR-1400  | Ø 166     | Ø 114.3 | Ø 30 | 25 | 200 | 1510 | 1585 | 1550 | 11 | 17.5 | 22   | 30*5 |
| 1600       | RDR-1600  |           |         | Ø 30 |    |     | 1710 | 1785 | 1750 |    |      |      | 30*5 |
| 1800       | RDR-1800  |           |         | Ø 35 |    |     | 2000 | 2075 | 2040 |    |      |      | 30*6 |
| 2000       | RDR-2000  |           |         | Ø 35 |    |     | 2200 | 2275 | 2240 |    |      | 30*7 |      |
| 2200       | RDR-2200  |           |         | Ø 40 |    |     | 2400 | 2475 | 2440 |    |      | 31   | 30*8 |
| 2400       | RDR-2400  |           |         |      |    |     | 2600 | 2675 | 2640 |    |      |      | 30*9 |

# Rubbex Roller

## CARRIER / IMPACT STAND

JIS STANDARD

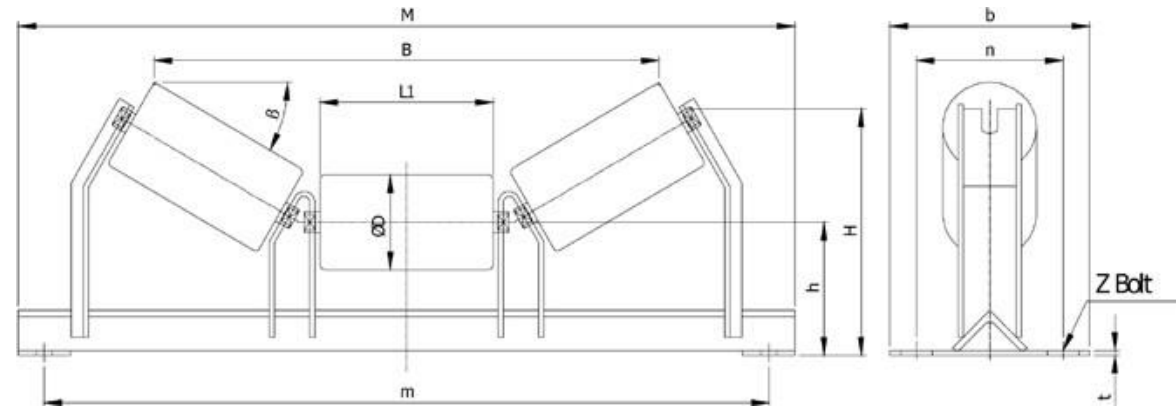


| Belt Width | Type      | Dimension |     |      |      |      |     |      |     |     |       |     |       |     |          |      |       | Angle |         |
|------------|-----------|-----------|-----|------|------|------|-----|------|-----|-----|-------|-----|-------|-----|----------|------|-------|-------|---------|
|            |           | ø D       | L1  | m    | M    | h    | n   | b    | t   | Z   | β=20° |     | β=30° |     | β=35°    |      | β=45° |       |         |
|            |           |           |     |      |      |      |     |      |     |     | B     | H   | B     | H   | B        | H    | B     |       | H       |
| 400        | CRS-400   | ø 89.1    | 145 | 640  | 690  | 125  | 140 | 190  | 6   | M12 | 465   | 223 | 426   | 246 | -        | -    | -     | -     | L50xt6  |
| 450        | CRS-450   |           | 165 | 690  | 740  |      |     |      |     |     | 522   | 230 | 481   | 256 | -        | -    | -     | -     |         |
| 500        | CRS-500   |           | 180 | 740  | 790  |      |     |      |     |     | 565   | 235 | 522   | 264 | -        | -    | -     | -     |         |
| 600        | CRS-600-1 | ø 114.3   | 210 | 840  | 890  | 140  | 150 | 200  | 6   |     | 652   | 261 | 604   | 294 | -        | -    | -     | -     | L60xt6  |
| 650        | CRS-650   |           | 225 | 890  | 940  |      |     |      |     |     | 695   | 266 | 640   | 302 | -        | -    | -     | -     |         |
| 600        | CRS-600-2 |           | 210 | 840  | 890  |      |     |      |     |     | 643   | 282 | 610   | 317 | 589      | 333  | 546   | 364   |         |
| 750        | CRS-750   | ø 114.3   | 265 | 1040 | 1090 | 150  | 160 | 210  | 6   |     | 802   | 301 | 760   | 344 | 734      | 365  | 678   | 403   | L75xt6  |
| 800        | CRS-800   |           | 275 | 1090 | 1140 |      |     |      |     |     | 830   | 304 | 787   | 349 | 760      | 370  | 702   | 410   |         |
| 900        | CRS-900   |           | 315 | 1190 | 1240 |      |     |      |     |     | 946   | 318 | 897   | 369 | 866      | 393  | 799   | 438   |         |
| 1000       | CRS-1000  | ø 139.8   | 350 | 1290 | 1340 | 180  | 180 | 230  | 6   |     | 1057  | 374 | 998   | 431 | 961      | 456  | 882   | 504   | L90xt8  |
| 1050       | CRS-1050  |           | 370 | 1340 | 1390 |      |     |      |     |     | 1115  | 381 | 1053  | 441 | 1014     | 468  | 931   | 519   |         |
| 1200       | CRS-1200  |           | 420 | 1490 | 1540 |      |     |      |     |     | 1295  | 398 | 1190  | 466 | 1146     | 497  | 1052  | 555   |         |
| 1400       | CRS-1400  | ø 165.2   | 500 | 1730 | 1790 | 250  | 280 | 340  | 9   | M16 | 1490  | 508 | 1414  | 589 | 1370     | 627  | 1261  | 697   | L100xt9 |
| 1600       | CRS-1600  |           | 580 | 1930 | 1990 |      |     |      |     |     | 1720  | 535 | 1633  | 629 | 1581     | 673  | 1454  | 754   |         |
| 1800       | CRS-1800  |           | 650 | 2220 | 2280 |      |     |      |     |     | 1922  | 589 | 1824  | 694 | 1766     | 743  | 1623  | 833   |         |
| 2000       | CRS-2000  |           | 730 | 2420 | 2480 | 2152 | 617 | 2042 | 734 |     | 1977  | 789 | 1816  | 890 | L130xt12 |      |       |       |         |
| 2200       | CRS-2200  |           | 800 | 2620 | 2680 | 300  | 330 | 390  | 12  | M20 | -     | -   | 2234  | 789 |          | 2161 | 849   | 1985  | 959     |
| 2400       | CRS-2400  |           | 880 | 2820 | 2880 |      |     |      |     |     | -     | -   | 2452  | 829 |          | 2372 | 895   | 2178  | 1016    |

produces  
retractable  
for impact  
roller stand

# Rubbex Roller

## TRANSITION STAND

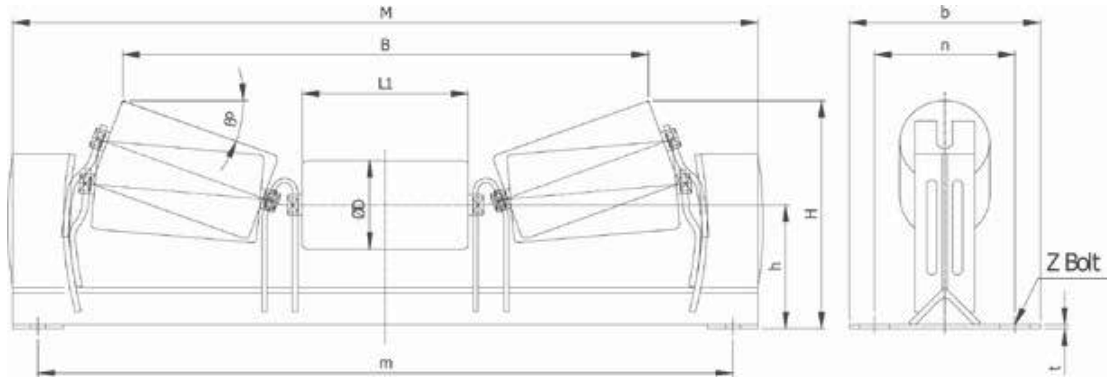

05° ~ 20°

05° ~ 30°


| Belt Width | Type      | Dimension |     |      |      |     |     |     |    |      |     |       |     |       |     | Z      | Angle   |
|------------|-----------|-----------|-----|------|------|-----|-----|-----|----|------|-----|-------|-----|-------|-----|--------|---------|
|            |           | ø D       | L1  | m    | M    | h   | n   | b   | t  | β=5° |     | β=20° |     | β=30° |     |        |         |
|            |           |           |     |      |      |     |     |     |    | B    | H   | B     | H   | B     | H   |        |         |
| 19 400     | TRS-400   | ø 89.1    | 145 | 640  | 690  | 125 | 140 | 190 | 6  | 506  | 184 | 465   | 223 | 426   | 246 | M12    | L50xt6  |
| 450        | TRS-450   |           | 165 | 690  | 740  |     |     |     |    | 566  | 186 | 522   | 230 | 481   | 256 |        |         |
| 500        | TRS-500   |           | 180 | 740  | 790  |     |     |     |    | 611  | 187 | 565   | 235 | 522   | 264 |        |         |
| 600        | TRS-600-1 |           | 210 | 840  | 890  | 140 | 150 | 200 | 6  | 700  | 204 | 652   | 261 | 604   | 294 |        | L60xt6  |
| 650        | TRS-650   |           | 225 | 890  | 940  |     |     |     |    | 744  | 205 | 695   | 266 | 640   | 302 |        |         |
| 600        | TRS-600-2 | ø 114.3   | 210 | 840  | 890  | 150 | 160 | 210 | 6  | 698  | 227 | 643   | 282 | 610   | 317 |        | L75xt6  |
| 750        | TRS-750   |           | 265 | 1040 | 1090 |     |     |     |    | 863  | 232 | 802   | 301 | 760   | 344 |        |         |
| 800        | TRS-800   |           | 275 | 1090 | 1140 |     |     |     |    | 874  | 251 | 830   | 304 | 787   | 349 |        |         |
| 900        | TRS-900   |           | 315 | 1190 | 1240 |     |     |     |    | 1012 | 236 | 946   | 318 | 897   | 369 |        |         |
| 1000       | TRS-1000  |           | 350 | 1290 | 1340 |     |     |     |    | 1135 | 282 | 1057  | 374 | 998   | 431 | L90xt8 |         |
| 1050       | TRS-1050  | ø 139.8   | 370 | 1340 | 1390 | 180 | 180 | 230 | 6  | 1195 | 284 | 1115  | 381 | 1053  | 441 |        |         |
| 1200       | TRS-1200  |           | 420 | 1490 | 1540 |     |     |     |    | 1344 | 288 | 1259  | 398 | 1190  | 466 |        |         |
| 1400       | TRS-1400  | ø 165.2   | 500 | 1730 | 1790 | 250 | 280 | 340 | 9  | 1592 | 378 | 1490  | 508 | 1414  | 589 | M16    | L100xt9 |
| 1600       | TRS-1600  |           | 580 | 1930 | 1990 |     |     |     |    | 1831 | 385 | 1720  | 535 | 1633  | 629 |        |         |
| 1800       | TRS-1800  |           | 650 | 2220 | 2280 | 280 | 330 | 390 | 9  | 2040 | 421 | 1922  | 589 | 1824  | 694 |        |         |
| 2000       | TRS-2000  |           | 730 | 2420 | 2480 |     |     |     |    | 2280 | 428 | 2152  | 617 | 2042  | 734 |        |         |
| 2200       | TRS-2200  |           | 800 | 2620 | 2680 | 300 | 330 | 390 | 12 | 2489 | 454 | 2210  | 667 | 2234  | 789 |        |         |
| 2400       | TRS-2400  |           | 880 | 2820 | 2880 |     |     |     |    | 2729 | 461 | 2430  | 795 | 2452  | 829 |        |         |

# Rubbex Roller

## SELF ALIGNING CARRIER

### JIS STANDARD

\*Support roller for  
BW1400-2400 Only

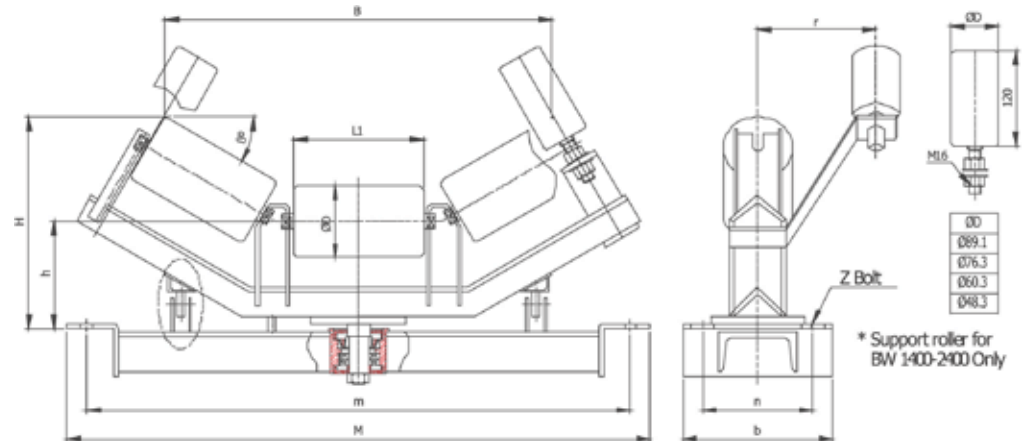


Z Bolt:  
M12 for BW 400-  
1200 M16 for BW  
1400 2000 M20 for  
BW2200-2400

| Dimension  |            |       |     |      |      |     |     |     |     |      |       |     |       |     |       |     |       |      | Channel  |
|------------|------------|-------|-----|------|------|-----|-----|-----|-----|------|-------|-----|-------|-----|-------|-----|-------|------|----------|
| Belt Width | Type       | Ø D   | L1  | m    | M    | h   | n   | b   | t   | r    | β=20° |     | β=30° |     | β=35° |     | β=45° |      |          |
|            |            |       |     |      |      |     |     |     |     |      | B     | H   | B     | H   | B     | H   | B     | H    |          |
| 400        | SACR-400   | 89.1  | 145 | 640  | 690  | 135 | 140 | 190 | 6   | 150  | 535   | 321 | 465   | 349 | -     | -   | -     | -    | 100x50x5 |
| 450        | SACR-450   |       | 165 | 690  | 740  |     |     |     |     |      | 583   | 326 | 511   | 356 | -     | -   | -     | -    |          |
| 500        | SACR-500   |       | 180 | 740  | 790  |     |     |     |     |      | 636   | 333 | 561   | 366 | -     | -   | -     | -    |          |
| 600        | SACR-600-1 |       | 210 | 840  | 890  |     |     |     |     |      | 731   | 360 | 651   | 399 | -     | -   | -     | -    |          |
| 650        | SACR-650   |       | 225 | 890  | 940  |     |     |     |     |      | 774   | 365 | 692   | 406 | -     | -   | -     | -    |          |
| 600        | SACR-600-2 | 114.3 | 210 | 840  | 890  | 150 | 200 | 6   | 180 | 741  | 386   | 664 | 427   | 625 | 445   | 546 | 477   |      |          |
| 750        | SACR-750   |       | 265 | 1040 | 1090 |     |     |     |     | 870  | 401   | 797 | 449   | 754 | 470   | 665 | 523   |      |          |
| 800        | SACR-800   |       | 275 | 1090 | 1140 |     |     |     |     | 898  | 404   | 824 | 454   | 770 | 475   | 689 | 530   |      |          |
| 900        | SACR-900   |       | 315 | 1190 | 1240 |     |     |     |     | 1014 | 418   | 933 | 474   | 885 | 499   | 785 | 544   |      |          |
| 1000       | SACR-1000  | 139.8 | 350 | 1290 | 1340 | 160 | 160 | 210 | 6   | 180  | 1137  | 473 | 1045  | 535 | 992   | 563 | 880   | 613  |          |
| 1050       | SACR-1050  |       | 370 | 1340 | 1390 |     |     |     |     |      | 1195  | 480 | 1100  | 545 | 1045  | 575 | 928   | 527  |          |
| 1200       | SACR-1200  |       | 420 | 1490 | 1540 |     |     |     |     |      | 1339  | 497 | 1237  | 570 | 1177  | 603 | 1049  | 662  |          |
| 1400       | SACR-1400  | 165.2 | 500 | 1730 | 1790 | 260 | 280 | 340 | 9   | 250  | 1515  | 594 | 1413  | 676 | 1355  | 714 | 1220  | 782  | 150x75x6 |
| 1600       | SACR-1600  |       | 580 | 1930 | 1990 |     |     |     |     |      | 1718  | 617 | 1605  | 709 | 1542  | 752 | 1392  | 828  |          |
| 1800       | SACR-1800  |       | 650 | 2220 | 2280 |     |     |     |     |      | 1910  | 669 | 1788  | 771 | 1718  | 819 | 1553  | 904  |          |
| 2000       | SACR-2000  |       | 730 | 2420 | 2480 | 290 | 330 | 390 | 9   | 250  | 2103  | 689 | 1972  | 801 | 1896  | 853 | 1718  | 946  | 200x80x7 |
| 2200       | SACR-2200  |       | 800 | 2620 | 2680 |     |     |     |     |      | -     | -   | 2163  | 856 | 2081  | 914 | 1887  | 1016 |          |
| 2400       | SACR-2400  |       | 880 | 2820 | 2880 |     |     |     |     |      | -     | -   | 2382  | 896 | 2292  | 960 | 2080  | 1072 |          |

# Rubbex Roller

## SELF ALIGNING RETURN

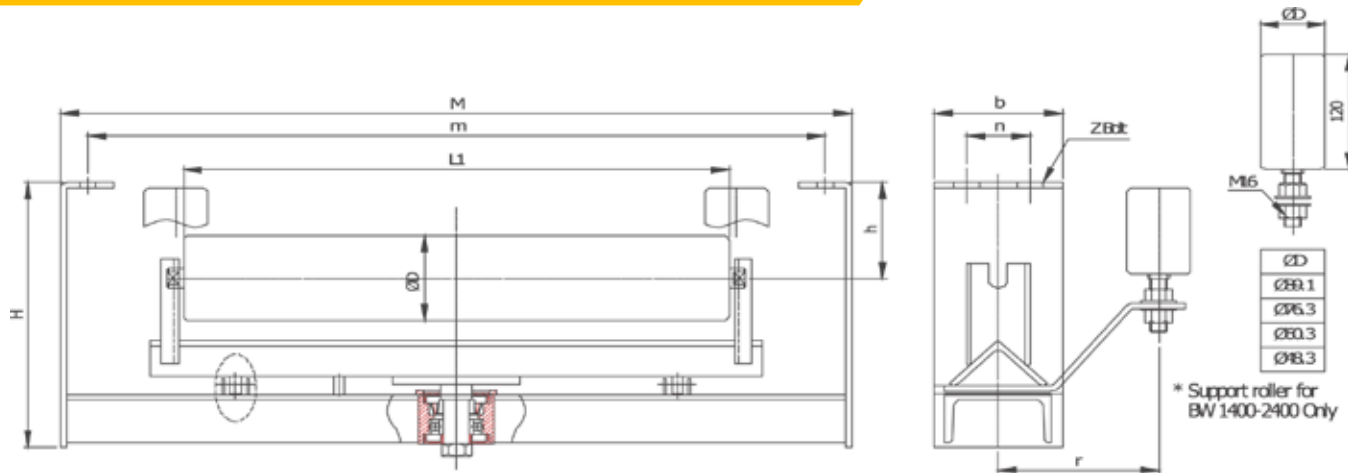

\* Support roller for  
BW 1400-2400 Only


| Belt Width | Type       | Dimension |      |      |      |     |     |     |   |     |     | z   | Channel  |
|------------|------------|-----------|------|------|------|-----|-----|-----|---|-----|-----|-----|----------|
|            |            | ø D       | L1   | m    | M    | h   | n   | b   | t | r   | H   |     |          |
| 400        | SARR-400   | ø 89.1    | 460  | 640  | 690  | 100 | 60  | 120 | 6 | 150 | 290 | M12 | 100x50x5 |
| 450        | SARR-450   |           | 510  | 690  | 740  |     |     |     |   |     |     |     |          |
| 500        | SARR-500   |           | 560  | 740  | 790  |     |     |     |   |     |     |     |          |
| 600        | SARR-600-1 |           | 660  | 840  | 890  |     |     |     |   |     |     |     |          |
| 650        | SARR-650   |           | 710  | 890  | 940  |     |     |     |   |     |     |     |          |
| 600        | SARR-600-2 | ø 114.3   | 660  | 840  | 890  | 100 | 60  | 120 | 6 | 180 | 305 |     |          |
| 750        | SARR-750   |           | 850  | 1040 | 1090 |     |     |     |   |     | 335 |     |          |
| 800        | SARR-800   |           | 900  | 1090 | 1140 |     |     |     |   |     |     |     |          |
| 900        | SARR-900   |           | 1000 | 1190 | 1240 |     |     |     |   |     |     |     |          |
| 1000       | SARR-1000  | ø 139.8   | 1100 | 1290 | 1340 | 120 | 100 | 170 | 6 | 180 | 380 |     |          |
| 1050       | SARR-1050  |           | 1150 | 1340 | 1390 |     |     |     |   |     |     |     |          |
| 1200       | SARR-1200  |           | 1300 | 1490 | 1540 |     |     |     |   |     |     |     |          |
| 1400       | SARR-1400  | ø 165.2   | 1510 | 1730 | 1790 | 160 | 120 | 200 | 6 | 250 | 530 | M16 | 150x75x6 |
| 1600       | SARR-1600  |           | 1710 | 1930 | 1990 |     |     |     |   |     | 540 |     |          |
| 1800       | SARR-1800  |           | 2000 | 2220 | 2280 |     |     |     |   |     |     |     |          |
| 2000       | SARR-2000  |           | 2200 | 2420 | 2480 |     |     |     |   |     |     |     |          |
| 2200       | SARR-2200  |           | 2400 | 2620 | 2680 | 180 | 150 | 250 | 9 | 250 | 560 | M20 | 200x80x7 |
| 2400       | SARR-2400  |           | 2600 | 2820 | 2880 |     |     |     |   |     |     |     |          |

# Rubbex Roller

## SELF ALIGNING V - RETURN

JIS STANDARD

05°

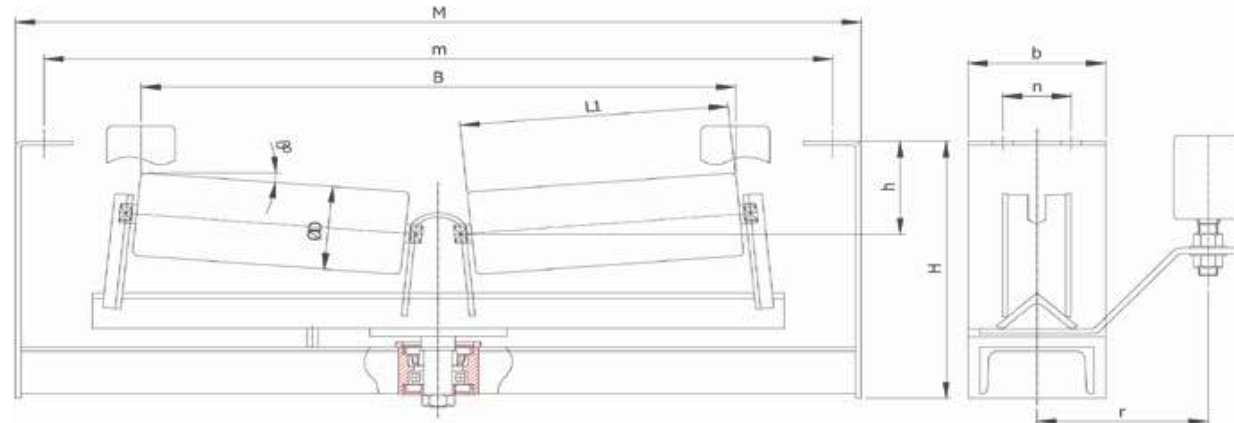

| Belt Width | Type       | Dimension |         |      |      |      |      |     |   |     |      |     | z   | Channel  |
|------------|------------|-----------|---------|------|------|------|------|-----|---|-----|------|-----|-----|----------|
|            |            | ø D       | L1      | m    | M    | h    | n    | b   | t | r   | β=5° |     |     |          |
|            |            |           |         |      |      |      |      |     |   |     | B    | H   |     |          |
| 400        | SAVR-400   | ø 89.1    | 220     | 640  | 690  | 100  | 60   | 120 | 6 | 150 | 584  | 290 | M12 | 100x50x5 |
| 450        | SAVR-450   |           | 245     | 690  | 740  |      |      |     |   |     | 634  |     |     |          |
| 500        | SAVR-500   |           | 270     | 740  | 790  |      |      |     |   |     | 684  |     |     |          |
| 600        | SAVR-600-1 |           | 320     | 840  | 890  |      |      |     |   |     | 783  | 305 |     |          |
| 650        | SAVR-650   |           | 365     | 890  | 940  |      |      |     |   |     | 872  |     |     |          |
| 600        | SAVR-600-2 | 320       | 840     | 890  | 800  | 345  |      |     |   |     |      |     |     |          |
| 750        | SAVR-750   | ø 114.3   | 415     | 1040 | 1090 |      | 950  |     |   |     |      |     |     |          |
| 800        | SAVR-800   |           | 440     | 1090 | 1140 |      | 999  |     |   |     |      |     |     |          |
| 900        | SAVR-900   |           | 490     | 1190 | 1240 | 1099 |      |     |   |     |      |     |     |          |
| 1000       | SAVR-1000  |           | ø 139.8 | 540  | 1290 | 1340 | 1217 | 390 |   |     |      |     |     |          |
| 1050       | SAVR-1050  | 565       |         | 1340 | 1390 | 1267 |      |     |   |     |      |     |     |          |
| 1200       | SAVR-1200  | 640       |         | 1490 | 1540 | 1416 |      |     |   |     |      |     |     |          |
| 1400       | SAVR-1400  | ø 165.2   | 750     | 1730 | 1790 | 160  | 120  | 200 | 6 | 250 | 1614 | 550 | M16 | 150x75x6 |
| 1600       | SAVR-1600  |           | 850     | 1930 | 1990 |      |      |     |   |     | 1813 |     |     |          |
| 1800       | SAVR-1800  |           | 980     | 2220 | 2280 |      |      |     |   |     | 2022 | 570 |     |          |
| 2000       | SAVR-2000  |           | 1080    | 2420 | 2480 |      |      |     |   |     | 2222 |     |     |          |
| 2200       | SAVR-2200  |           | 1180    | 2620 | 2680 | 180  | 150  | 250 | 9 | 250 | 2431 | 590 | M20 | 200x80x7 |
| 2400       | SAVR-2400  |           | 1280    | 2820 | 2880 |      |      |     |   |     | 2630 |     |     |          |


“

Rubbex produces with  
Inclination degree of  
10° - 15°

”

# Rubbex Roller

## DRUM PULLY

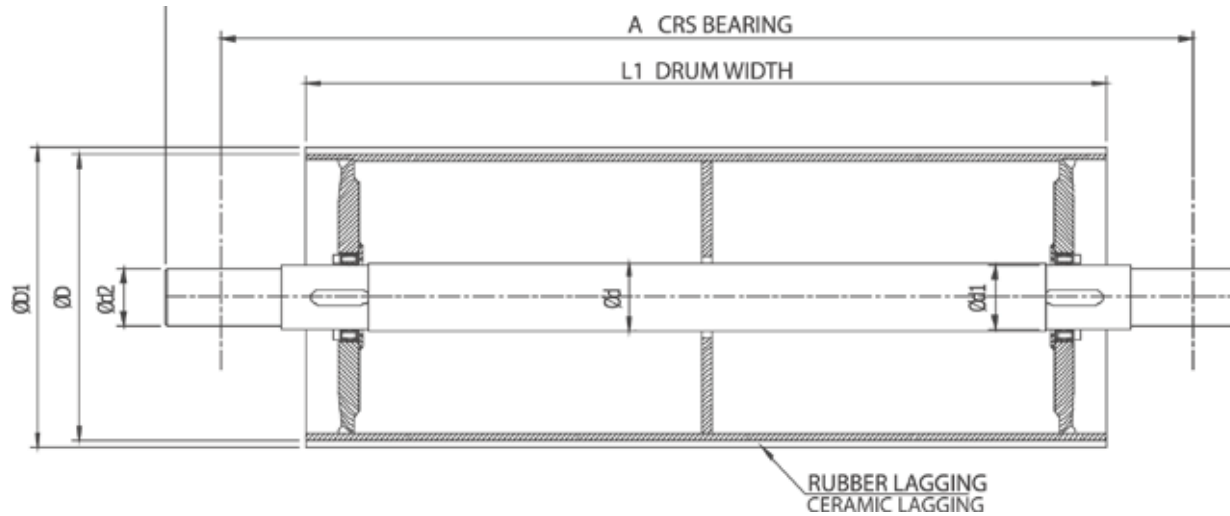

Rubbex Company produces a wide variety of pulleys which is designed with high quality to meet the standard of CEMA. Steel rim, hub, end disc are combined into an integral component by continuous welded bond to maximize pulley's strength, balance, and concentricity.

Drum pulley is designed by standard straight tube which can also be designed with crown tube depending on customer's demand.

Standard design of pulley:

- Keytype
- PowerLock
- TaperLock

Lagging Type :

- Hot vulcanized lagging
- Ceramic lagging

| Belt Width | Drum length of Pulley |      |
|------------|-----------------------|------|
|            | mm                    | Inch |
| 400        | 500                   | 19   |
| 450        | 550                   | 21   |
| 500        | 600                   | 24   |
| 600        | 700                   | 28   |
| 750        | 900                   | 36   |
| 800        | 1000                  | 39   |
| 900        | 1100                  | 43   |
| 1000       | 1200                  | 47   |
| 1050       | 1250                  | 49   |
| 1200       | 1400                  | 55   |
| 1400       | 1600                  | 63   |
| 1600       | 1800                  | 71   |
| 1800       | 2000                  | 78   |
| 2000       | 2200                  | 87   |
| 2200       | 2400                  | 95   |
| 2400       | 2600                  | 102  |



# RUBBEX ROLLER

## PRODUCT CATALOGUE

Level 7-1 Menara Rajawali Jl. DR Anak Agung Gde Agung,  
Lot#5.1, Mega Kuningan, Jakarta Selatan.  
Indonesia.12950 Ph: (021) 2960 1505



Website: [www.rubbexconveyors.com](http://www.rubbexconveyors.com)



OUR VISION IS TO BE PERFECT,  
EXCELLENT AND BEST  
IN THE WORLD



Together, We Make It Better.



# RBK International Indonesia (Rubbex Conveyors & Engineering)

Level 7-1 Menara Rajawali Jl. DR Anak Agung Gde Agung, Lot#5.1,  
Mega Kuningan, Jakarta Selatan. Indonesia. 12950 Ph: (021) 2960 1505

Contact : +61404219800 | +62 822-5254-9696 |

Email : [vinod@rbkinternational.com](mailto:vinod@rbkinternational.com)  
[sales@rubbexconveyors.com](mailto:sales@rubbexconveyors.com)



## INDIA

AMBA MATA TEMPLE, AT-P0 - ODE, TA-  
DI - ANAND, GUJARAT,  
INDIA-388210



## INDONESIA

KAWASAN MEGA KUNINGAN, KE1.  
KUNINGAN TIMUR, KEC. SETIABUDI, KOTA  
ADM. JAKARTA SELATAN, PROV. DKI  
JAKARTA



## DUBAI

THE BURLINGTON TOWER - BUSINESS  
BAY -DUBAI -UNITED ARAB EMIRATES



## SINGAPORE

10 ANSON RD #22-02 INTERNATIONAL  
PLAZA SINGAPORE 079903



## BENIN

RBK INTERNATIONAL BENIN  
SARLITTORAL , COTONOU 11TH  
ARRONDLSEMENT, GBEGAMEY TF 535,  
A MALSON YAMADJAKA IMMACULEE



## UNITED KINGDOM

RBK INTERNATIONAL (UK) LTD KEMP  
HOUSE 160 CITY ROAD CENTRAL  
LONDON EC1V 2NX.



## CANADA

RBK GLOBAL CANADA LIMITED  
WILLOWMOUNT DR TORONTO  
ON M1L 1Y1 CANADA



## NETHERLANDS

RBK INTERNATIONAL NETHERLANDS  
B.V. GUSTAV MAHLERPLEIN 2, 1082 MA,  
AMSTERDAM THE NETHERLANDS



## AUSTRALIA

RBK INTERNATIONAL (AUSTRALIA)  
PTY LTD 66 BERMBING STREET THE  
PONDS NSW 2769 SYDNEY, AUSTRALIA.